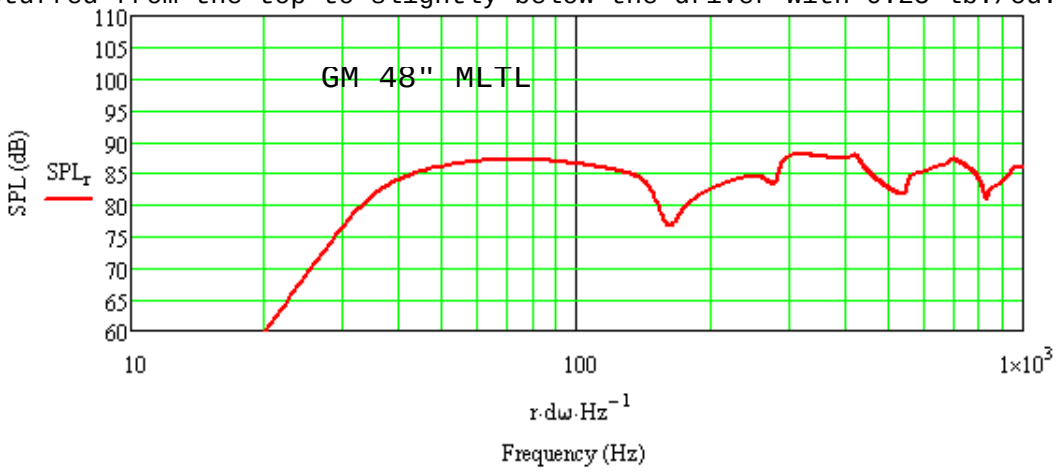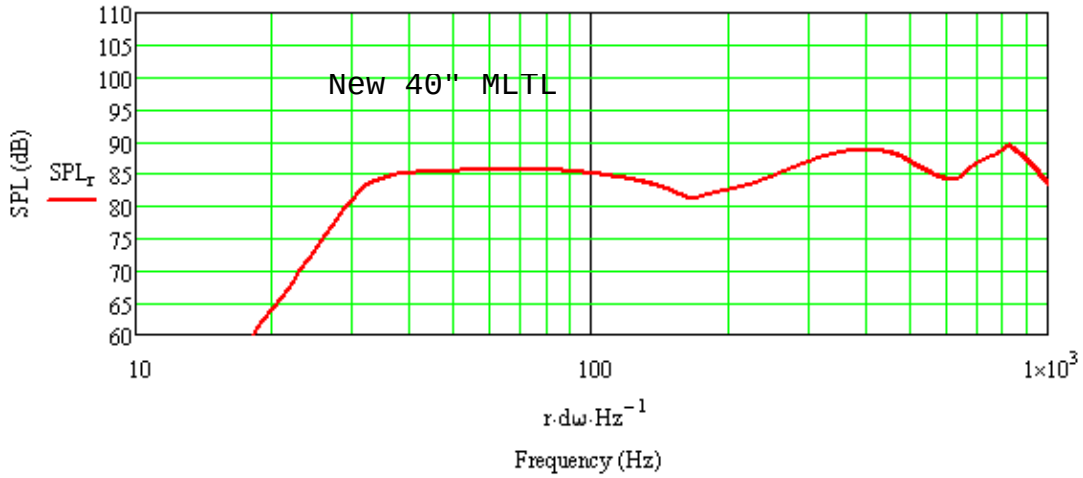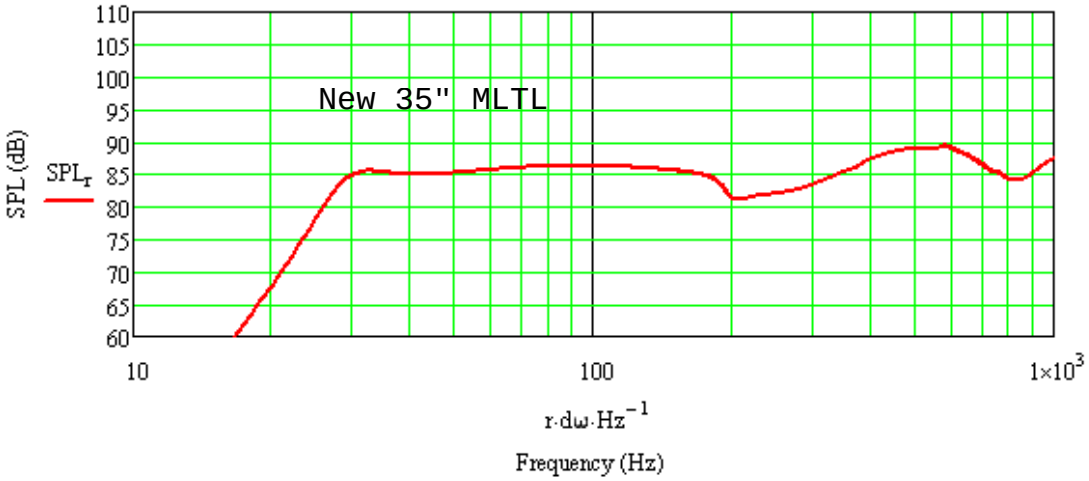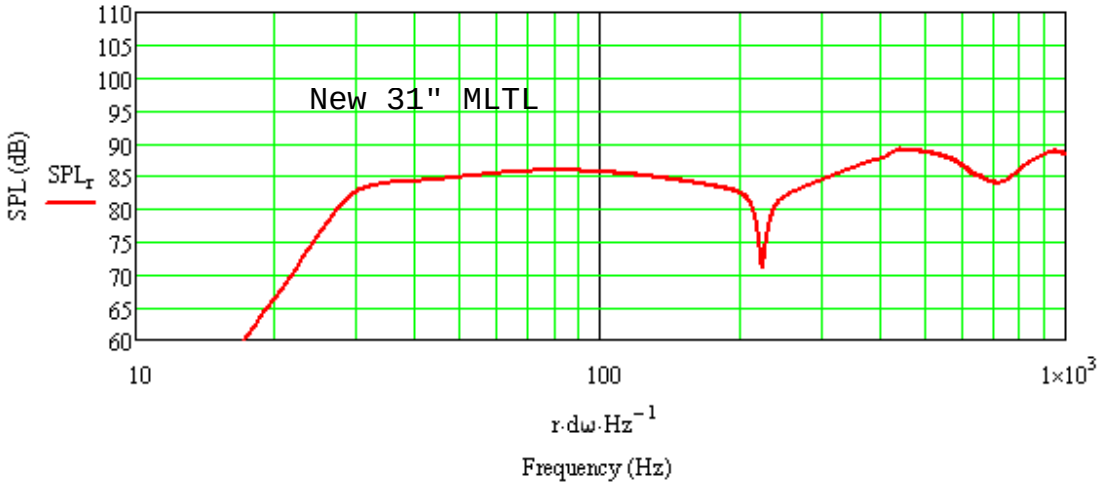Enclosures stuffed from the top to slightly below the driver with 0.25 lb./cu. ft. stuffing